

Emergency Light Clid ELC1

Easily locate evacuation exits during power outages. Lighting for up to 100 minutes. This LED fixture offers two aimable heads to direct the lighting where it is needed, a battery that can be recharged in just 24 hours, and a self-diagnostic button with a LED indicator to confirm the battery charge status


Technical Data

Input voltage	100 - 277 V~
Input frequency	50/60 Hz
Correlated Color Temperature	6,500 K
Color Rendering Index	≥80
Ambient temperature range	-10°C — 60°C
Harmonic distortion	<20%
Power factor	0.2
Beam angle	180°
Mounting	Surface mount
Ingress protection	IP30
Surge protection	1500V
Lumen maintenance @100,000 hours	0.86 *Projected L70(12k) ≥ 72,000 hours according to IES TM-21
Housing materials	Polymer
Optic materials	Polymer
Product Color	White
Warranty	5 Years

Certifications




Model	Power output	Luminous efficiency	Luminous flux
ELC1	4 W	85 lm/W	340 lm

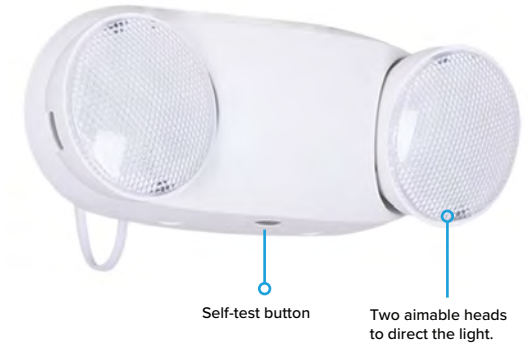

Dimensions

Model EML2

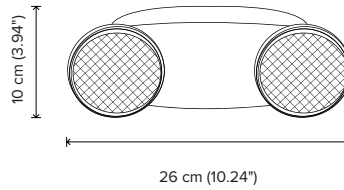

Ordering guide

1 Series

ELC1

Example ELC1
1