



STRIP LIGHTING

LED-ST-P



APPLICATIONS

	Retails & Supermarkets
	Hotels & Restaurants
	Commercial Buildings
	Offices And Showrooms
	Schools & Colleges

SpecGrade
 888-410-5337
www.SpecGrade.com

**Meets DLC 5.1
 Requirements**



Product Description:



Product Description:

With its slim design, this new linear strip light seamlessly blends flat high quality housing and precision optics to produce a sleek, subtle aesthetic that meets most office ceiling application needs. It is ideal for office spaces, supermarkets, meeting rooms, and workshops.

Features:

LISTING

- ▶ UL and CUL listed

HOUSING

- ▶ Housing made of high quality steel with high reflectance paint, providing high lumen output.

AMBIENT TEMPERATURE

- ▶ Suitable for use in -40°C to +40°C

EFFICACY

- ▶ Up to 130 lumens per watt (see individual wattage data)

CCT AND CRI

- ▶ 3000K, 4000K and 5000K CCT available, 80CRI

LENS

- ▶ Precision and high reflectance lens producing superior uniformity

ELECTRICAL

- ▶ Voltage: 120-277V standard, Class 2 constant current Drivers with 90% power factor, <20% THD. Driver efficiency (>90% standard);50/60Hz;
- ▶ 2KV-4KV Surge.
- ▶ Dimming 0-10V driver Standard.
- ▶ Occupancy sensor (PIR) optional.

FINISHES

- ▶ Polyester powder white finish, Multi-stage process produces 3mil thickness for superior corrosion and maximum environmental durability.

Scan QR CODE
for more information

SpecGrade
888-410-5337
www.SpecGrade.com



* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

STRIP LIGHTING



Performance Data

Model NO.	System Watts	Lumens*	Efficacy*	Linkable
LED-ST2-20P	20W	2608 lm*	131 lm/W*	2ft
LED-ST4-45P	22/33/45W	5467 lm*	123 lm/W*	4ft connect up to 8ft

*Lumen and efficacy are based on highest wattage 5000K

Specification:


Example: LED-ST-P

Model No.	System Watts	Input Voltage	CRI	Color Temp	Finish	Option
LED-ST2-20P	20W	UNV= 120-277VAC	8=80+	30=3000 K	WH=White	FAO = Tunable Smart Controller BLANK = No Sensor OS =Occupancy Sensor EM = Emergency Driver
LED-ST4-45P	22W 33W 45W			40= 4000 K 50=5000 K		




* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:



LED-ST2-20P

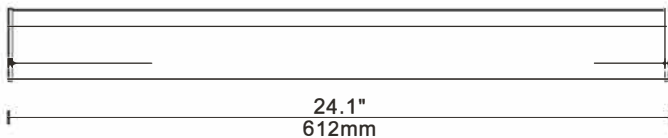

Scan **QR CODE**
for more information


SpecGrade
888-410-5337
www.SpecGrade.com





* Different LED Kelvin temperature available with 4-6 week lead time. Please call for a quote.

** DISCLAIMER: This test report was produced in accordance with IES LM-79 photometric testing protocol for luminaires, using a single representative test fixture. Actual production units may vary from the values reported here by up to ±10%.

Dimension:

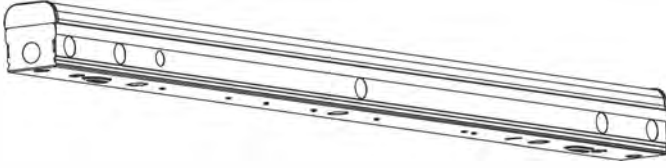

LED-ST4-45P



48"
1219mm

3.03"
77mm
2.65"
67.4mm

