

# TAURUS-C

## HAZARDOUS LOCATION LED

**10W, 15W, 20W, 30W**  
HAZARDOUS LOCATION LED

- Class I - Div 2: Groups A, B, C, D
- UL 1598A Marine Listed
- IP66 Rated
- IK10 Rated
- NEMA 4X



### POWER

Available in 10W, 15W, 20W, 30W Configurations

### PRECISION

Custom-Engineered Optics Offer Precisely Directed Light

### ENGINEERING


Die Cast Aluminum Housing and Tempered Glass Lens

## ORDERING INFORMATION

EXAMPLE PART #: TAUC - 20 - 40K - 90 - V01 - GR - CM - NDIM

TAUC			120	V01	GR				
SERIES	WATTS	CCT	OPTICS	INPUT PWR	FINISH	MOUNTING		DIMMING	
TAUC	10	35K	120	V01   110/277V	GR	CM	Ceiling Mount	NDIM	No Dimming
	15	40K				PM	Pendant Mount	VDIM	0-10V Dimmable
	20	50K				WM	90° Wall Mount	R1	Symmetrical Reflector
	30	57K							

## OPTICS

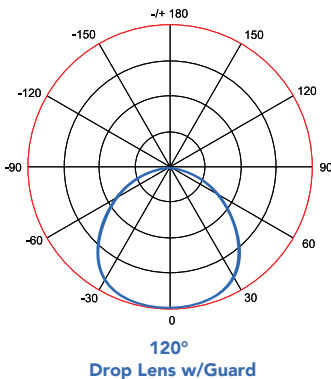

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

### SPECIFICATIONS

**Expected Life** | Over 85,000 hrs.  
**Rating** | IP66 & IK10  
**Color Rendering Index (CRI)** | 70  
**Operating Temp** | -40°C – +60°C  
**Relative Humidity** | 10-90% RH  
**Power Factor** | >.95  
**Input Line Voltage** | 90-305VAC  
**Input Line Frequency** | 50/60 Hz  
**LED Chips** | Philips  
**Driver** | Meanwell  
**Surge Protection** | 10KV  
**DC Output Ripple & Noise** | <200mVP-P  
**T-Rating** | T4

### LISTINGS

**UL 1598A Marine Listed**  
**UL 1598 Listed**  
**UL 844 Listed**  
 - Class I, Division 2, Groups A,B,C,D  
 - Class II, Division 2, Groups F,G  
 - Class III  
**NEMA 4X**

### MATERIALS

**Housing** | Die Cast Aluminum  
**Gasketing** | Fluorosilicone Rubber  
**Hardware** | Stainless Steel  
**Finish** | Polyester Powdercoat  
**Lens** | Tempered Glass

### LUMEN CHART

	3500K	4000K	5000K	5700K
<b>10W</b>	1,200 lm	1,280 lm	1,350 lm	1,400 lm
<b>15W</b>	1,800 lm	1,920 lm	2,025 lm	2,100 lm
<b>20W</b>	2,400 lm	2,560 lm	2,700 lm	2,800 lm
<b>30W</b>	3,600 lm	3,840 lm	4,050 lm	4,200 lm

Typical delivered lumen data is approximate. Actual lumens will vary due to installation environment and beam pattern. Please see IES files.





### PRODUCT DRAWINGS

Ceiling Mount (CM)

Pendant Mount (PM)

Wall Mount (WM)

Wall Mount W/Reflector (WM)

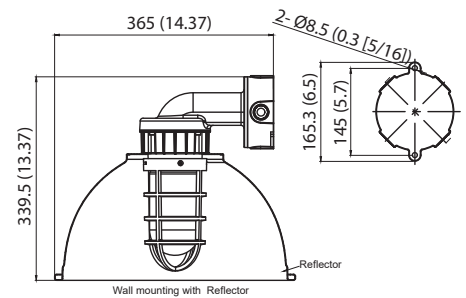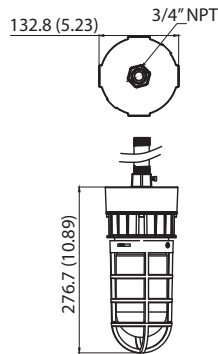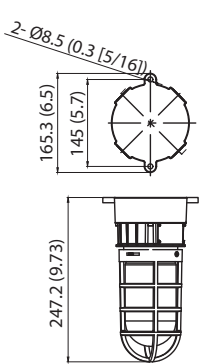

Units: mm (in.)