

PROJECT

CATALOG #

TYPE

SPEC PRO 2

LED SPORTSLIGHTER

600W, 750W, 1250W

REPLACES UP TO A 1600-WATT METAL HALIDE FIXTURE

- Seamless Cold Forged Heat Sink & Die Cast Housing
- Expected Life over 100,000 Hours
- Suitable for Indoor and Outdoor Locations
- Superior Optics for Exceptional Beam Uniformity
- Delivers Over 130 Lumens Per Watt
- IP-66 Rated
- Optional Laser Aiming Attachment
- Integrated 10KV Surge Suppression



POWER

Available from 600W up to 1250W Configurations

PRECISION

High-Precision Optics are Paired with an Engraved Protractor & Laser Aimer

ENGINEERING


Cold Forged Heat Sink Keeps High-Output LEDs Cooler During Operation

ORDERING INFORMATION

EXAMPLE PART #: SPL2 - 600 - 40K - 15 - V01 - BL - TL - VDIM

SPL2					BL	TL	VDIM
SERIES	WATTS	CCT	OPTICS	INPUT PWR	FINISH	MOUNTING	DIMMING
SPL2	600	30K	15	V01 110/277V	BL	TL Tilt Bracket	VDIM 0-10V Dimmable
	750	40K	20	V04 347/480V			
	1250	50K	25				
		57K	40				
		65K	60				
			80				

OPTICS

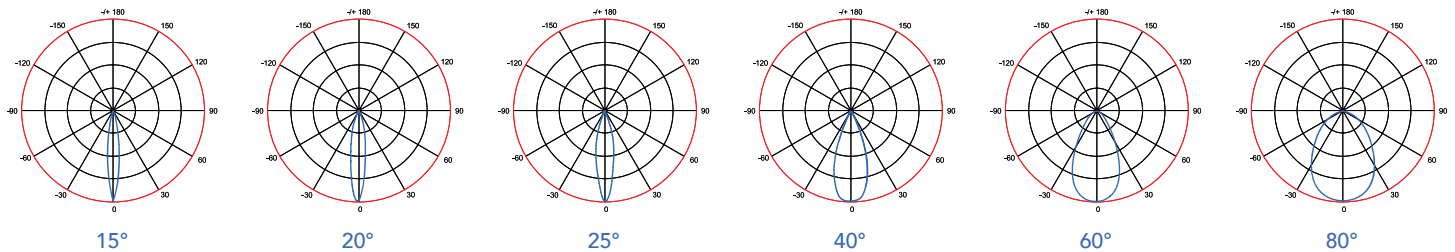

Due to continuous improvement and innovation, product appearance and specifications may change without notice. Actual performance may differ as a result of end-user environment and application.

SPEC PRO 2

LED SPORTSLIGHTER - 600W, 750W, 1250W

SPECIFICATIONS

Expected Life | Over 100,000 hrs.
Rating | IP66
Color Rendering Index (CRI) | >70Ra
Power Factor | >95%
Input Line Voltage | 100-277 / 200-480 VAC
Input Line Frequency | 50/60 Hz
THD | <15%
LED Chips | Osram
Driver | Meanwell
Weight | 66 lb
EPA | 2.02 ft²

LISTINGS

UL Listed
FCC Listed
CE Listed

MATERIALS

Heat Sink | Cold Forged Aluminum
Housing | Die Cast Aluminum
Hardware | 18-8 Stainless Steel
Finish | Protective UV Stabilized Powdercoat
Lens | Polycarbonate
Driver | 600W & 750W: Integral Driver
1250W: Remote Driver

LUMEN CHART

	ALL CCT
600W	78,000 lm
750W	97,500 lm
1250W	162,500 lm

Typical delivered lumen data is approximate. Actual lumens will vary due to installation environment and beam pattern. Please see IES files.

PRODUCT DRAWINGS

